

JC715 U.S. PTO  
10/28/99

Please type a plus sign (+) inside this box → ☒

PTO/SB/05 (4/98)  
Approved for use through 09/30/2000. OMB 0651-0032  
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE  
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

# UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))

Attorney Docket No. RCA 89541

First Inventor or Application Identifier Mary L. Comer, et al

Title Apparatus and Method for (over)

Express Mail Label No. EL533624930US

## APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

1. ☒ \* Fee Transmittal Form (e.g., PTO/SB/17)  
(Submit an original and a duplicate for fee processing)
2. ☐ Specification [Total Pages 34]  
(preferred arrangement set forth below)
  - Descriptive title of the invention
  - Cross References to Related Applications
  - Statement Regarding Fed sponsored R & D
  - Reference to Microfiche Appendix
  - Background of the invention
  - Brief Summary of the invention
  - Brief Description of the Drawings (if filed)
  - Detailed Description
  - Claim(s)
  - Abstract of the Disclosure
3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 5]
4. Oath or Declaration [Total Pages 1]
  - a. ☒ Newly executed (original or copy)
  - b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d))  
(for continuation/divisional with Box 16 completed)
    - i. ☐ DELETION OF INVENTOR(S)  
Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).

\* NOTE FOR ITEMS 1 & 15: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.37), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.38).

## ADDRESS TO:

Assistant Commissioner for Patents  
Box Patent Application  
Washington, DC 20231

5. ☐ Microfiche Computer Program (Appendix)
6. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
  - a. ☐ Computer Readable Copy
  - b. ☐ Paper Copy (identical to computer copy)
  - c. ☐ Statement verifying identity of above copies

## ACCOMPANYING APPLICATION PARTS

7. ☒ Assignment Papers (cover sheet & document(s))
8. ☐ 37 C.F.R. § 3.73(b) Statement of Power of Attorney (when there is an assignee) ☒
9. ☐ English Translation Document (if applicable)
10. ☒ Information Disclosure Statement (IDS)/PTO-1449 [10] Copies of IDS Citations
11. ☐ Preliminary Amendment
12. ☒ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)
13. ☐ \* Small Entity Statement(s) filed in prior application. (PTO/SB/09-12) ☐ Status still proper and desired
14. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)
15. ☐ Other: \_\_\_\_\_

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: \_\_\_\_\_

Prior application information: Examiner \_\_\_\_\_

Group / Art Unit: \_\_\_\_\_

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

## 17. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label

(Insert Customer No. or Attach bar code label here)

or ☐ Correspondence address below

Name	Joseph S. Tripoli					
	Thomson Multimedia Licensing Inc.					
Address	P.O. Box 5312					
	Two Independence Way					
City	Princeton	State	NJ	Zip Code	08543	
Country	United States	Telephone	609/734-9503	Fax	609/734-9700	

Name (Print/Type)	Alexander J. Burke	Registration No. (Attorney/Agent)	40,425
Signature	<i>Alexander Burke</i>	Date	28 October 1999

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

APPARATUS AND METHOD FOR DERIVING AN ENHANCED DECODED  
REDUCED-RESOLUTION VIDEO SIGNAL FROM A CODED HIGH-DEFINITION  
VIDEO SIGNAL

5 This is a non-provisional application of provisional application serial No. 60/133,429 by M. L. Comer et al, filed 11 May 1999.

Field of the Invention:

10 The present invention relates to the decoding of a coded high-definition (HD) video signal to derive an enhanced decoded video signal suitable, for example, for recording or producing a picture-in-picture (PIP) or other reduced-resolution display.

Description of the Prior Art:

15 Known in the art are television receivers that, while displaying a relatively large picture derived from a primary television channel, also simultaneously display a small picture-in-picture (PIP) derived from a secondary television channel. In the case of a high-definition television (HDTV) receiver, the receiver must include a relatively complex and expensive decoder that conforms with the MPEG ISO 13818-2 standard for decoding a received coded HD video signal in real time for high definition display.  
20 However, because the PIP is small, there is no need to provide a high definition PIP display because a viewer inherently would not be able to resolve the higher definition components of a high definition PIP. Therefore, to provide the PIP, the HDTV receiver may be supplied with a lower-resolution second simpler and less expensive decoder which still conforms with the ISO 13818-2 standard.

25 One approach, known in the art, to providing a lower-resolution second decoder which is somewhat simpler and less expensive than the decoder providing the high definition display, is disclosed in the three U.S. patents 5,614,952, 5,614,957 and 5,635,985, which were, respectively, issued to Boyce et al. on March 25,1997, March 25,1997 and June 3, 1997.

30 Further, incorporated herein by reference is the teaching of copending U.S. patent application S.N. 09/349,865, filed July 8, 1999 and assigned to the same assignee as the present application, which is directed to a lower-resolution second-decoder approach suitable for deriving a PIP display in real time from a received coded HD video signal that is significantly simpler and less expensive to implement than is  
35 the second decoder disclosed by Boyce et al, but still conforms with the ISO 13818-2 standard.

## SUMMARY OF THE INVENTION

A system involves decoding compressed image data including frequency domain coefficients defining blocks of pixel values representing an image at a first resolution to provide an image at a reduced second resolution. The system includes a motion-compensation-unit (MCU) processor responsive to a selected sub-set of the frequency domain coefficients for deriving the image of the reduced second resolution. The motion-compensation-unit (MCU) processor employs blocks of pixel values representing image data at an intermediate third resolution lower than the first resolution and higher than the reduced second resolution.

## BRIEF DESCRIPTION OF THE DRAWING

FIGURE 1 is a functional block diagram showing a variable-length decoder (VLD) responsive to an input HD MPEG data bit-stream for providing a first selected MPEG data output to a PIP decoding means and a second selected MPEG data output to an HD decoding means;

FIGURE 1a shows an 8x8 block containing the 64 DCT coefficients that are employed by the HD decoding means of FIGURE 1, FIGURE 1b shows an 8x8 block containing the particular 10 DCT coefficients of the 64 DCT coefficients shown in FIGURE 1a that are employed by the PIP decoding means of FIGURE 1 for progressive-scan sequences and FIGURE 1c shows an 8x8 block containing the particular 10 DCT coefficients of the 64 DCT coefficients shown in FIGURE 1a that are employed by the PIP decoding means of FIGURE 1 for interlaced-scan sequences;

FIGURE 2 is a simplified functional block diagram of an embodiment of the PIP decoding means of FIGURE 1 which incorporates features of the present invention;

FIGURE 3 is a functional block diagram showing details of the enhanced MCU processing means of FIGURE 2.

FIGURE 4 is a conceptual diagram showing the computational processing performed by the DCT-based upsample means of FIGURE 3; and

FIGURE 5 is a conceptual diagram showing the computational processing performed by the DCT-based downsample means of FIGURE 3.

## DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring to FIGURE 1, there is shown VLD 100, PIP decoding means 102 and HD decoding means 104. In accordance with the known teaching of the MPEG ISO

13818-2 standard, one of the responses of VLD 100 to the input coded HD MPEG data comprising a sequence of MPEG I, P and B frames is to convey coded picture information defined by each of successive 8x8 blocks of quantized discrete cosine transform (DCT) coefficients as an input to HD decoding means 104. Further, in accordance with the known teaching of the MPEG ISO 13818-2 standard, among the functions performed by HD decoding means 104 is to first perform inverse quantization of each successive 8x8 block of DCT coefficients and then perform inverse discrete cosine transformation (IDCT) of the DCT coefficients of each successive 8x8 block. Finally, HD decoding means 104 must perform motion compensation for each P frame and bi-directionally predictive B frame after IDCT has been performed on that P or B frame.

FIGURE 1a shows an 8x8 block of DCT coefficients, wherein (1) the value of coefficient  $DCT_{0,0}$  (located in the upper left corner of the 8x8 block) represents the average (DC) value (i.e., both the horizontal and vertical frequencies are 0) of the picture defined by the 64 values of a corresponding 8x8 block of pixels prior to having undergone DCT, while (2) the value of coefficient  $DCT_{7,7}$  (located in the lower right corner of the 8x8 block) represents the highest horizontal frequency and highest vertical frequency components of the picture defined by the 64 values of a corresponding 8x8 block of pixels prior to having undergone DCT. For the case of a HD picture, all, or nearly all, of the 64 DCT coefficients from  $DCT_{0,0}$  to  $DCT_{7,7}$  inclusive of FIGURE 1a may have non-zero values. This results in a relatively large amount of image-processing computation to accomplish IDCT in real time. Further, motion compensation also involves a large amount of real time image-processing computation. Therefore, HD decoding means 104 requires about 96 Mbits memory to temporarily store MPEG decoded image frames prior to display. HD decoding means 104 requires these frames for motion compensation to reconstruct accurate images for display. Thus, a physical implementation of HD decoding means 104 is relatively expensive.

Returning to FIGURE 1, another of the responses of VLD 100 to the input coded HD MPEG data is to convey only coded picture information defined by a relatively small given number of lower-frequency-defining, quantized DCT coefficients of each successive 8x8 block as an input to PIP decoding means 102. It is to be noted that the PIP processing and images and the term PIP itself is used herein to encompass any form of reduced resolution image and processing and not just television PIP image generation. While the preferred tutorial example of the PIP decoding means described in the aforesaid patent application S.N 09/349,865 employed only the 6 lowest-frequency quantized DCT coefficients, the preferred tutorial example of enhanced-

quality PIP decoding means 102, described in detail below, employs 10 DCT coefficients consisting of  $DCT_{0,0}$ ,  $DCT_{1,0}$ ,  $DCT_{2,0}$ ,  $DCT_{3,0}$ ,  $DCT_{0,1}$ ,  $DCT_{1,1}$ ,  $DCT_{2,1}$ ,  $DCT_{0,2}$ ,  $DCT_{1,2}$ , and  $DCT_{0,3}$  shown in FIGURE 1b for progressive-scan use or, alternatively, consisting of  $DCT_{0,0}$ ,  $DCT_{1,0}$ ,  $DCT_{2,0}$ ,  $DCT_{0,1}$ ,  $DCT_{1,1}$ ,  $DCT_{0,2}$ ,  $DCT_{0,3}$ ,  $DCT_{0,4}$ ,  $DCT_{0,5}$ , and  $DCT_{0,6}$  shown in FIGURE 1c for interlaced-scan use, thereby providing better high-frequency response for the enhanced PIP display. More specifically, the PIP bit-stream received by VLD 100 has been pre-parsed by a VLD-PIP parser (not shown to simplify Figure 1) to remove from the bitstream DCT coefficients which are not needed by the PIP decoder.

The simplified functional block diagram of the embodiment of enhanced-quality PIP decoding means 102 shown in FIGURE 2 comprises runlength decoder (RLD) 200, inverse quantizer (IQ) 202, unitary enhanced IDCT, filtering and pixel-decimation processing means 204, base-layer adder 205B, enhancement-layer adder 205E, base and enhancement-layer decimated pixel memory 206, enhancement-layer encoder 207, enhanced motion compensation unit (MCU) processing means 208 and sample-rate converter 210. Although the simplified functional block diagram of FIGURE 2 does not show means for controlling the operation of this embodiment of enhanced-quality PIP decoding means 102, it should be understood that suitable control means that conform with the requirements of the ISO 13818-2 standard is included in a physical implementation of this embodiment.

For illustrative purposes, the following description of elements 200, 202, 204, 205B, 205E, 206, 207, 208 and 210 assumes that each of these elements is being operated in accordance with the above-discussed preferred tutorial example.

In this example, RLD 200 outputs 10 DCT coefficients for each 8x8 coded block using the 2 scan patterns defined in the ISO 13818-2 standard. The positioning of the 10 DCT coefficients within each 8x8 block is illustrated in Figure 1b for progressive scan and in Figure 1c for interlaced scan, as determined by the state of the progressive\_sequence flag. In the Figure 1b progressive sequence case, if the alternate\_scan flag from the picture coding extension for the current picture is 0, the 10 DCT coefficients correspond to coefficients 0,1,2,3,4,5,6,7,8,9 in 1-dimensional scan order, whereas if alternate\_scan is 1, the 10 DCT coefficients of interest are coefficients 0,1,2,3,4,5,6,7,8,20 in scan order. In the Figure 1c interlaced sequence case, if the alternate\_scan flag from the picture coding extension for the current picture is 0, the 10 DCT coefficients correspond to coefficients 0,1,2,3,4,5,9,10,20,21 in 1-dimensional scan order, whereas if alternate\_scan is 1, the 10 DCT coefficients of interest are coefficients 0,1,2,3,4,5,6,10,11,12 in scan order. There are two run values that have a meaning in RLD 200 which is different from that described in the ISO

13818-2 standard, depending on the value of the alternate\_scan and progressive\_sequence flags. For progressive sequences, if alternate\_scan is 0, a run value of 10 indicates that the coefficients needed by PIP decoder 102 are all 0 and there is no subsequent non-zero coefficient. Similarly, if alternate\_scan is 1, a run value of 21 indicates that the coefficients needed by decoder 102 are all 0 and there is no subsequent non-zero coefficient. For interlaced sequences, if alternate\_scan is 0, a run value of 22 indicates that the coefficients needed by PIP decoder 102 are all 0 and there is no subsequent non-zero coefficient. Similarly, if alternate\_scan is 1, a run value of 13 indicates that the coefficients needed by decoder 102 are all 0 and there is no subsequent non-zero coefficient. Table 1, summarizes the meaning of run values of 10 and 21 for the two possible values of the alternate\_scan flag for progressive sequence and Table 2, summarizes the meaning of run values of 13 and 22 for the two possible values of the alternate\_scan flag for interlaced sequence. All other alternate\_scan/run value combinations encountered by RLD 200 are interpreted as described in the ISO 13818-2 standard.

Run	Alternate_Scan	Interpretation in PIP RLD
10	0	All DCT coefficients = 0
10	1	Same as ISO 13818-2 standard
21	0	Not allowed
21	1	All DCT coefficients = 0

Table 1-Interpretation of run = 10 and run = 21 by RLD 200 for progressive sequences

Run	Alternate_Scan	Interpretation in PIP RLD
13	0	Same as ISO 13818-2 standard
13	1	All DCT coefficients = 0
22	0	All DCT coefficients = 0
22	1	Not allowed

Table 2-Interpretation of run = 13 and run = 22 by RLD 200 for interlaced sequences

IQ 202 performs inverse quantization arithmetic and saturation described in the ISO 13818-2 standard on the 10 DCT coefficients shown in FIGURE 1b for progressive sequences and shown in FIGURE 1c for interlaced sequences. The mismatch control portion of the inverse quantization process is not needed. Conventionally, an extensive computational process requiring three separate steps is needed to convert the coded frequency domain information in an 8x8 block at the output from IQ 202, into spatial domain picture information comprising respective values of a smaller block of decimated pixels of a reduced-resolution PIP display

image. The first step is to determine the value of each of the 64 (i.e., full pixel density) pixel values of each 8x8 block of picture information as an IDCT function of the inversely-quantized DCT coefficient values. Thereafter, the second step of lowpass filtering followed by the third step of pixel decimation may be performed on the pixels in each successive 8x8 block to provide the desired smaller block of decimated pixels. For instance, a decimation of alternate horizontal and vertical filtered pixels for the case of a progressive scan would result in a 75% reduction in pixel density. Similarly, a decimation of 3 out of 4 successive filtered pixels in the horizontal direction for the case of an interlaced scan would also result in a 75% reduction in pixel density. Thus, in either case, such a decimation performed for luma pixels and also for chroma pixels would result in a reduction in pixel density from 64 per 8x8 block to only 16 per 8x8 block for each of them. However, the amount of hardware required to implement this conventional three-step computational process is relatively large and, therefore, relatively expensive.

In accordance with the principles of the invention taught in the aforesaid patent application S.N. 09/349,865, the unitary IDCT, filtering and pixel-decimation processing means disclosed therein is able to convert the coded respective values of inversely-quantized DCT coefficients contained in an 8x8 block at the output from IQ 202, into a smaller block of decimated pixels in a single-step computational process. Thus, the amount of hardware required to implement this single-step computational process by means 204 is relatively small and, therefore, relatively inexpensive compared to the aforesaid conventional three-step computational process.

Specifically, in accordance with the teachings of the aforesaid patent application S.N. 09/349,865, the decimated pixel memory thereof (which, because of pixel decimation, requires a storage capacity size of only 1/4 the capacity size of a corresponding undecimated pixel memory) comprises a plurality of separate buffers. Each of these buffers is capable of temporarily storing decimated luma and chroma pixels. In conformity with the ISO 13818-2 standard, the decimated pixel memory includes one or more buffers for storing decimated pixels that define reconstructed intracoded (I), predictive-coded (P) and/or bi-directionally predictive-coded (B) frame or field pictures. Further, motion-compensated prediction macroblock output of pixel values from the MCU processing means is added in an adder to each corresponding macroblock output derived in the unitary IDCT, filtering and pixel-decimation processing means. The summed pixel values of the output from the adder are stored into a first buffer of the decimated pixel memory. This first buffer may be a first-in first-out (FIFO) buffer in which the stored decimated pixels may be reordered between (1) being written into the first buffer and (2) being read out from the first buffer and

written into another buffer of the decimated pixel memory. In the case of a current P or B frame or field, the decimated pixel memory includes a buffer for storing a macroblock for input to the MCU processing means to provide motion compensation.

In accordance with the principles of the present invention, two layers of decimated pixels are advantageously stored respectively in base and enhancement-layer decimated pixel memory 206 to achieve high-quality motion compensation and improve PIP image quality. The first of these two layers is a base-layer of decimated pixels and the second of these two layers is an enhancement-layer of vector-quantized values of luma macroblock decimated pixels that are employed in enhanced MCU processing means 208 during decoding of P pictures. The enhanced layer is used to provide a reduced resolution image of greater resolution than is obtainable by using just the decimated pixels of the base-layer. Both the base-layer and this enhancement-layer are employed by enhanced MCU processing means 208, in a manner described in detail below.

Preferred embodiments of IDCT, filtering and pixel-decimation processing means 204, enhancement-layer encoder 207 and enhanced MCU processing means 208 for implementing the present invention will now be described in detail.

The unitary enhanced IDCT, filtering and pixel-decimation processing means 204 provides the following sets of 16 decimated pixel values for each of the base and enhancement-layers used for each of progressive scan and interlaced scan (each set being a function of 10 DCT coefficient values).

PROGRESSIVE-SCAN, BASE-LAYER SET OF DECIMATED PIXEL VALUES

$$\begin{aligned}
 g_1(0,0) &= [8DCT_{0,0} + 10DCT_{1,0} + 7DCT_{2,0} + 4DCT_{3,0} + 10DCT_{0,1} + 13DCT_{1,1} + 9DCT_{2,1} \\
 &\quad + 7DCT_{0,2} + 9DCT_{1,2} + 4DCT_{0,3}] / 64 \\
 g_1(1,0) &= [8DCT_{0,0} + 4DCT_{1,0} - 7DCT_{2,0} - 9DCT_{3,0} + 10DCT_{0,1} + 5DCT_{1,1} - 9DCT_{2,1} \\
 &\quad + 7DCT_{0,2} + 4DCT_{1,2} + 4DCT_{0,3}] / 64 \\
 g_1(2,0) &= [8DCT_{0,0} - 4DCT_{1,0} - 7DCT_{2,0} + 9DCT_{3,0} + 10DCT_{0,1} - 5DCT_{1,1} - 9DCT_{2,1} \\
 &\quad + 7DCT_{0,2} - 4DCT_{1,2} + 4DCT_{0,3}] / 64 \\
 g_1(3,0) &= [8DCT_{0,0} - 10DCT_{1,0} + 7DCT_{2,0} - 4DCT_{3,0} + 10DCT_{0,1} - 13DCT_{1,1} + 9DCT_{2,1} \\
 &\quad + 7DCT_{0,2} - 9DCT_{1,2} + 4DCT_{0,3}] / 64 \\
 g_1(0,1) &= [8DCT_{0,0} + 10DCT_{1,0} + 7DCT_{2,0} + 4DCT_{3,0} + 4DCT_{0,1} + 5DCT_{1,1} + 4DCT_{2,1} \\
 &\quad - 7DCT_{0,2} - 9DCT_{1,2} - 9DCT_{0,3}] / 64 \\
 g_1(1,1) &= [8DCT_{0,0} + 4DCT_{1,0} - 7DCT_{2,0} - 9DCT_{3,0} + 4DCT_{0,1} + 2DCT_{1,1} - 4DCT_{2,1} \\
 &\quad - 7DCT_{0,2} - 4DCT_{1,2} - 9DCT_{0,3}] / 64 \\
 g_1(2,1) &= [8DCT_{0,0} - 4DCT_{1,0} - 7DCT_{2,0} + 9DCT_{3,0} + 4DCT_{0,1} - 2DCT_{1,1} - 4DCT_{2,1} \\
 &\quad - 7DCT_{0,2} + 4DCT_{1,2} - 9DCT_{0,3}] / 64
 \end{aligned}$$



$$g_1(3,1) = [8DCT_{0,0} - 10DCT_{1,0} + 7DCT_{2,0} - 4DCT_{3,0} + 4DCT_{0,1} - 5DCT_{1,1} + 4DCT_{2,1} - 7DCT_{0,2} + 9DCT_{1,2} - 9DCT_{0,3}] / 64$$

$$g_1(0,2) = [8DCT_{0,0} + 10DCT_{1,0} + 7DCT_{2,0} + 4DCT_{3,0} - 4DCT_{0,1} - 5DCT_{1,1} - 4DCT_{2,1} - 7DCT_{0,2} - 9DCT_{1,2} + 9DCT_{0,3}] / 64$$

$$5 \quad g_1(1,2) = [8DCT_{0,0} + 4DCT_{1,0} - 7DCT_{2,0} - 9DCT_{3,0} - 4DCT_{0,1} - 2DCT_{1,1} + 4DCT_{2,1} - 7DCT_{0,2} - 4DCT_{1,2} + 9DCT_{0,3}] / 64$$

$$g_1(2,2) = [8DCT_{0,0} - 4DCT_{1,0} - 7DCT_{2,0} + 9DCT_{3,0} - 4DCT_{0,1} + 2DCT_{1,1} + 4DCT_{2,1} - 7DCT_{0,2} + 4DCT_{1,2} + 9DCT_{0,3}] / 64$$

$$10 \quad g_1(3,2) = [8DCT_{0,0} - 10DCT_{1,0} + 7DCT_{2,0} - 4DCT_{3,0} - 4DCT_{0,1} + 5DCT_{1,1} - 4DCT_{2,1} - 7DCT_{0,2} + 9DCT_{1,2} + 9DCT_{0,3}] / 64$$

$$g_1(0,3) = [8DCT_{0,0} + 10DCT_{1,0} + 7DCT_{2,0} + 4DCT_{3,0} - 10DCT_{0,1} - 13DCT_{1,1} - 9DCT_{2,1} + 7DCT_{0,2} + 9DCT_{1,2} - 4DCT_{0,3}] / 64$$

$$g_1(1,3) = [8DCT_{0,0} + 4DCT_{1,0} - 7DCT_{2,0} - 9DCT_{3,0} - 10DCT_{0,1} - 5DCT_{1,1} + 9DCT_{2,1} + 7DCT_{0,2} + 4DCT_{1,2} - 4DCT_{0,3}] / 64$$

$$15 \quad g_1(2,3) = [8DCT_{0,0} - 4DCT_{1,0} - 7DCT_{2,0} + 9DCT_{3,0} - 10DCT_{0,1} + 5DCT_{1,1} + 9DCT_{2,1} + 7DCT_{0,2} - 4DCT_{1,2} - 4DCT_{0,3}] / 64$$

$$g_1(3,3) = [8DCT_{0,0} - 10DCT_{1,0} + 7DCT_{2,0} - 4DCT_{3,0} - 10DCT_{0,1} + 13DCT_{1,1} - 9DCT_{2,1} + 7DCT_{0,2} - 9DCT_{1,2} - 4DCT_{0,3}] / 64$$

## 20 PROGRESSIVE-SCAN, ENHANCEMENT-LAYER SET OF DECIMATED PIXEL VALUES

$$g_0(0,0) = [0DCT_{0,0} + 0DCT_{1,0} + 0DCT_{2,0} + 0DCT_{3,0} + 1DCT_{0,1} + 1DCT_{1,1} + 1DCT_{2,1} + 3DCT_{0,2} + 4DCT_{1,2} + 6DCT_{0,3}] / 64$$

$$g_0(1,0) = [0DCT_{0,0} + 0DCT_{1,0} + 0DCT_{2,0} + 0DCT_{3,0} + 1DCT_{0,1} + 0DCT_{1,1} - 1DCT_{2,1} + 3DCT_{0,2} + 2DCT_{1,2} + 6DCT_{0,3}] / 64$$

$$25 \quad g_0(2,0) = [0DCT_{0,0} + 0DCT_{1,0} + 0DCT_{2,0} + 0DCT_{3,0} + 1DCT_{0,1} + 0DCT_{1,1} - 1DCT_{2,1} + 3DCT_{0,2} - 2DCT_{1,2} + 6DCT_{0,3}] / 64$$

$$g_0(3,0) = [0DCT_{0,0} + 0DCT_{1,0} + 0DCT_{2,0} + 0DCT_{3,0} + 1DCT_{0,1} - 1DCT_{1,1} + 1DCT_{2,1} + 3DCT_{0,2} - 4DCT_{1,2} + 6DCT_{0,3}] / 64$$

$$30 \quad g_0(0,2) = [0DCT_{0,0} + 0DCT_{1,0} + 0DCT_{2,0} + 0DCT_{3,0} + 2DCT_{0,1} + 3DCT_{1,1} + 2DCT_{2,1} + 3DCT_{0,2} + 4DCT_{1,2} - 2DCT_{0,3}] / 64$$

$$g_0(1,2) = [0DCT_{0,0} + 0DCT_{1,0} + 0DCT_{2,0} + 0DCT_{3,0} + 2DCT_{0,1} + 1DCT_{1,1} - 2DCT_{2,1} + 3DCT_{0,2} + 2DCT_{1,2} - 2DCT_{0,3}] / 64$$

$$g_0(2,2) = [0DCT_{0,0} + 0DCT_{1,0} + 0DCT_{2,0} + 0DCT_{3,0} + 2DCT_{0,1} - 1DCT_{1,1} - 2DCT_{2,1} + 3DCT_{0,2} - 2DCT_{1,2} - 2DCT_{0,3}] / 64$$

$$35 \quad g_0(3,2) = [0DCT_{0,0} + 0DCT_{1,0} + 0DCT_{2,0} + 0DCT_{3,0} + 2DCT_{0,1} - 3DCT_{1,1} + 2DCT_{2,1} + 3DCT_{0,2} - 4DCT_{1,2} - 2DCT_{0,3}] / 64$$

$$g_0(0,4) = [0DCT_{0,0} + 0DCT_{1,0} + 0DCT_{2,0} + 0DCT_{3,0} + 2DCT_{0,1} + 3DCT_{1,1} + 2DCT_{2,1}$$

$$\begin{aligned}
& - 3DCT_{0,2} - 4DCT_{1,2} - 2DCT_{0,3}] / 64 \\
g_0(1,4) &= [0DCT_{0,0} + 0DCT_{1,0} + 0DCT_{2,0} + 0DCT_{3,0} + 2DCT_{0,1} + 1DCT_{1,1} - 2DCT_{2,1} \\
& - 3DCT_{0,2} - 2DCT_{1,2} - 2DCT_{0,3}] / 64 \\
g_0(2,4) &= [0DCT_{0,0} + 0DCT_{1,0} + 0DCT_{2,0} + 0DCT_{3,0} + 2DCT_{0,1} - 1DCT_{1,1} - 2DCT_{2,1} \\
& - 3DCT_{0,2} + 2DCT_{1,2} - 2DCT_{0,3}] / 64 \\
g_0(3,4) &= [0DCT_{0,0} + 0DCT_{1,0} + 0DCT_{2,0} + 0DCT_{3,0} + 2DCT_{0,1} - 3DCT_{1,1} + 2DCT_{2,1} \\
& - 3DCT_{0,2} + 4DCT_{1,2} - 2DCT_{0,3}] / 64 \\
g_0(0,6) &= [0DCT_{0,0} + 0DCT_{1,0} + 0DCT_{2,0} + 0DCT_{3,0} + 1DCT_{0,1} + 1DCT_{1,1} + 1DCT_{2,1} \\
& - 3DCT_{0,2} - 4DCT_{1,2} + 6DCT_{0,3}] / 64 \\
g_0(1,6) &= [0DCT_{0,0} + 0DCT_{1,0} + 0DCT_{2,0} + 0DCT_{3,0} + 1DCT_{0,1} + 0DCT_{1,1} - 1DCT_{2,1} \\
& - 3DCT_{0,2} - 2DCT_{1,2} + 6DCT_{0,3}] / 64 \\
g_0(2,6) &= [0DCT_{0,0} + 0DCT_{1,0} + 0DCT_{2,0} + 0DCT_{3,0} + 1DCT_{0,1} + 0DCT_{1,1} - 1DCT_{2,1} \\
& - 3DCT_{0,2} + 2DCT_{1,2} + 6DCT_{0,3}] / 64 \\
g_0(3,6) &= [0DCT_{0,0} + 0DCT_{1,0} + 0DCT_{2,0} + 0DCT_{3,0} + 1DCT_{0,1} - 1DCT_{1,1} + 1DCT_{2,1} \\
& - 3DCT_{0,2} + 4DCT_{1,2} + 6DCT_{0,3}] / 64
\end{aligned}$$

INTERLACED-SCAN, BASE-LAYER SET OF DECIMATED PIXEL VALUES

$$\begin{aligned}
g_1(0,0) &= [8DCT_{0,0} + 7DCT_{1,0} + 11DCT_{0,1} + 10DCT_{1,1} + 10DCT_{0,2} + 0DCT_{2,0} + 9DCT_{0,3} \\
& + 8DCT_{0,4} + 6DCT_{0,5} + 4DCT_{0,6}] / 64 \\
g_1(1,0) &= [8DCT_{0,0} - 7DCT_{1,0} + 11DCT_{0,1} - 10DCT_{1,1} + 10DCT_{0,2} + 0DCT_{2,0} + 9DCT_{0,3} \\
& + 8DCT_{0,4} + 6DCT_{0,5} + 4DCT_{0,6}] / 64 \\
g_1(0,1) &= [8DCT_{0,0} + 7DCT_{1,0} + 9DCT_{0,1} + 9DCT_{1,1} + 4DCT_{0,2} + 0DCT_{2,0} - 2DCT_{0,3} \\
& - 8DCT_{0,4} - 11DCT_{0,5} - 10DCT_{0,6}] / 64 \\
g_1(1,1) &= [8DCT_{0,0} - 7DCT_{1,0} + 9DCT_{0,1} - 9DCT_{1,1} + 4DCT_{0,2} + 0DCT_{2,0} - 2DCT_{0,3} \\
& - 8DCT_{0,4} - 11DCT_{0,5} - 10DCT_{0,6}] / 64 \\
g_1(0,2) &= [8DCT_{0,0} + 7DCT_{1,0} + 6DCT_{0,1} + 6DCT_{1,1} - 4DCT_{0,2} + 0DCT_{2,0} - 11DCT_{0,3} \\
& - 8DCT_{0,4} + 2DCT_{0,5} + 10DCT_{0,6}] / 64 \\
g_1(1,2) &= [8DCT_{0,0} - 7DCT_{1,0} + 6DCT_{0,1} - 6DCT_{1,1} - 4DCT_{0,2} + 0DCT_{2,0} - 11DCT_{0,3} \\
& - 8DCT_{0,4} + 2DCT_{0,5} + 10DCT_{0,6}] / 64 \\
g_1(0,3) &= [8DCT_{0,0} + 7DCT_{1,0} + 2DCT_{0,1} + 2DCT_{1,1} - 10DCT_{0,2} + 0DCT_{2,0} - 6DCT_{0,3} \\
& + 8DCT_{0,4} + 9DCT_{0,5} - 4DCT_{0,6}] / 64 \\
g_1(1,3) &= [8DCT_{0,0} - 7DCT_{1,0} + 2DCT_{0,1} - 2DCT_{1,1} - 10DCT_{0,2} + 0DCT_{2,0} - 6DCT_{0,3} \\
& + 8DCT_{0,4} + 9DCT_{0,5} - 4DCT_{0,6}] / 64 \\
g_1(0,4) &= [8DCT_{0,0} + 7DCT_{1,0} - 2DCT_{0,1} - 2DCT_{1,1} - 10DCT_{0,2} + 0DCT_{2,0} + 6DCT_{0,3} \\
& + 8DCT_{0,4} - 9DCT_{0,5} - 4DCT_{0,6}] / 64 \\
g_1(1,4) &= [8DCT_{0,0} - 7DCT_{1,0} - 2DCT_{0,1} + 2DCT_{1,1} - 10DCT_{0,2} + 0DCT_{2,0} + 6DCT_{0,3} \\
& + 8DCT_{0,4} - 9DCT_{0,5} - 4DCT_{0,6}] / 64
\end{aligned}$$

## 10

$$g_1(0,5) = [8DCT_{0,0} + 7DCT_{1,0} - 6DCT_{0,1} - 6DCT_{1,1} - 4DCT_{0,2} + 0DCT_{2,0} + 11DCT_{0,3} - 8DCT_{0,4} - 2DCT_{0,5} + 10DCT_{0,6}] / 64$$

$$g_1(1,5) = [8DCT_{0,0} - 7DCT_{1,0} - 6DCT_{0,1} + 6DCT_{1,1} - 4DCT_{0,2} + 0DCT_{2,0} + 11DCT_{0,3} - 8DCT_{0,4} - 2DCT_{0,5} + 10DCT_{0,6}] / 64$$

$$5 \quad g_1(0,6) = [8DCT_{0,0} + 7DCT_{1,0} - 9DCT_{0,1} - 9DCT_{1,1} + 4DCT_{0,2} + 0DCT_{2,0} + 2DCT_{0,3} - 8DCT_{0,4} + 11DCT_{0,5} - 10DCT_{0,6}] / 64$$

$$g_1(1,6) = [8DCT_{0,0} - 7DCT_{1,0} - 9DCT_{0,1} + 9DCT_{1,1} + 4DCT_{0,2} + 0DCT_{2,0} + 2DCT_{0,3} - 8DCT_{0,4} + 11DCT_{0,5} - 10DCT_{0,6}] / 64$$

$$10 \quad g_1(0,7) = [8DCT_{0,0} + 7DCT_{1,0} - 11DCT_{0,1} - 10DCT_{1,1} + 10DCT_{0,2} + 0DCT_{2,0} - 9DCT_{0,3} + 8DCT_{0,4} - 6DCT_{0,5} + 4DCT_{0,6}] / 64$$

$$g_1(1,7) = [8DCT_{0,0} - 7DCT_{1,0} - 11DCT_{0,1} + 10DCT_{1,1} + 10DCT_{0,2} + 0DCT_{2,0} - 9DCT_{0,3} + 8DCT_{0,4} - 6DCT_{0,5} + 4DCT_{0,6}] / 64$$

INTERLACED-SCAN, ENHANCEMENT-LAYER SET OF DECIMATED PIXEL VALUES

$$15 \quad g_0(0,0) = [0DCT_{0,0} + 3DCT_{1,0} + 0DCT_{0,1} + 4DCT_{1,1} + 0DCT_{0,2} + 7DCT_{2,0} + 0DCT_{0,3} + 0DCT_{0,4} + 0DCT_{0,5} + 0DCT_{0,6}] / 64$$

$$g_0(2,0) = [0DCT_{0,0} + 3DCT_{1,0} + 0DCT_{0,1} + 4DCT_{1,1} + 0DCT_{0,2} - 7DCT_{2,0} + 0DCT_{0,3} + 0DCT_{0,4} + 0DCT_{0,5} + 0DCT_{0,6}] / 64$$

$$20 \quad g_0(0,1) = [0DCT_{0,0} + 3DCT_{1,0} + 0DCT_{0,1} + 4DCT_{1,1} + 0DCT_{0,2} + 7DCT_{2,0} + 0DCT_{0,3} + 0DCT_{0,4} + 0DCT_{0,5} + 0DCT_{0,6}] / 64$$

$$g_0(2,1) = [0DCT_{0,0} + 3DCT_{1,0} + 0DCT_{0,1} + 4DCT_{1,1} + 0DCT_{0,2} - 7DCT_{2,0} + 0DCT_{0,3} + 0DCT_{0,4} + 0DCT_{0,5} + 0DCT_{0,6}] / 64$$

$$g_0(0,2) = [0DCT_{0,0} + 3DCT_{1,0} + 0DCT_{0,1} + 2DCT_{1,1} + 0DCT_{0,2} + 7DCT_{2,0} + 0DCT_{0,3} + 0DCT_{0,4} + 0DCT_{0,5} + 0DCT_{0,6}] / 64$$

$$25 \quad g_0(2,2) = [0DCT_{0,0} + 3DCT_{1,0} + 0DCT_{0,1} + 2DCT_{1,1} + 0DCT_{0,2} - 7DCT_{2,0} + 0DCT_{0,3} + 0DCT_{0,4} + 0DCT_{0,5} + 0DCT_{0,6}] / 64$$

$$g_0(0,3) = [0DCT_{0,0} + 3DCT_{1,0} + 0DCT_{0,1} + 1DCT_{1,1} + 0DCT_{0,2} + 7DCT_{2,0} + 0DCT_{0,3} + 0DCT_{0,4} + 0DCT_{0,5} + 0DCT_{0,6}] / 64$$

$$30 \quad g_0(2,3) = [0DCT_{0,0} + 3DCT_{1,0} + 0DCT_{0,1} + 1DCT_{1,1} + 0DCT_{0,2} - 7DCT_{2,0} + 0DCT_{0,3} + 0DCT_{0,4} + 0DCT_{0,5} + 0DCT_{0,6}] / 64$$

$$g_0(0,4) = [0DCT_{0,0} + 3DCT_{1,0} + 0DCT_{0,1} - 1DCT_{1,1} + 0DCT_{0,2} + 7DCT_{2,0} + 0DCT_{0,3} + 0DCT_{0,4} + 0DCT_{0,5} + 0DCT_{0,6}] / 64$$

$$g_0(2,4) = [0DCT_{0,0} + 3DCT_{1,0} + 0DCT_{0,1} - 1DCT_{1,1} + 0DCT_{0,2} - 7DCT_{2,0} + 0DCT_{0,3} + 0DCT_{0,4} + 0DCT_{0,5} + 0DCT_{0,6}] / 64$$

$$35 \quad g_0(0,5) = [0DCT_{0,0} + 3DCT_{1,0} + 0DCT_{0,1} - 2DCT_{1,1} + 0DCT_{0,2} + 7DCT_{2,0} + 0DCT_{0,3} + 0DCT_{0,4} + 0DCT_{0,5} + 0DCT_{0,6}] / 64$$

$$g_0(2,5) = [0DCT_{0,0} + 3DCT_{1,0} + 0DCT_{0,1} - 2DCT_{1,1} + 0DCT_{0,2} - 7DCT_{2,0} + 0DCT_{0,3}$$

$$+ 0DCT_{0,4} + 0DCT_{0,5} + 0DCT_{0,6}] / 64$$

$$g_0(0,6) = [0DCT_{0,0} + 3DCT_{1,0} + 0DCT_{0,1} - 4DCT_{1,1} + 0DCT_{0,2} + 7DCT_{2,0} + 0DCT_{0,3} \\ + 0DCT_{0,4} + 0DCT_{0,5} + 0DCT_{0,6}] / 64$$

5

$$g_0(2,6) = [0DCT_{0,0} + 3DCT_{1,0} + 0DCT_{0,1} - 4DCT_{1,1} + 0DCT_{0,2} - 7DCT_{2,0} + 0DCT_{0,3} \\ + 0DCT_{0,4} + 0DCT_{0,5} + 0DCT_{0,6}] / 64$$

$$g_0(0,7) = [0DCT_{0,0} + 3DCT_{1,0} + 0DCT_{0,1} - 4DCT_{1,1} + 0DCT_{0,2} + 7DCT_{2,0} + 0DCT_{0,3} \\ + 0DCT_{0,4} + 0DCT_{0,5} + 0DCT_{0,6}] / 64$$

$$g_0(2,7) = [0DCT_{0,0} + 3DCT_{1,0} + 0DCT_{0,1} - 4DCT_{1,1} + 0DCT_{0,2} - 7DCT_{2,0} + 0DCT_{0,3} \\ + 0DCT_{0,4} + 0DCT_{0,5} + 0DCT_{0,6}] / 64$$

10

Each of the above "Progressive-Scan Set of Decimated Pixel Values" and above "Interlaced-Scan Set of Decimated Pixel Values" was derived in the following manner:

15

1. If  $DCT_{u,v}$  denotes the DCT coefficient with horizontal frequency index  $u$  and vertical frequency index  $v$ , then the IDCT equation which would be used to decode a block denoted  $f(x,y)$  at full resolution (where  $x = 0, \dots, N-1$ ;  $y = 0, \dots, N-1$ ) is given by

$$f(x,y) = \frac{2}{N} \sum_{u=0}^{N-1} \sum_{v=0}^{N-1} C(u)C(v)DCT_{u,v} \cos \frac{(2x+1)u\pi}{2N} \cos \frac{(2y+1)v\pi}{2N} \quad (1)$$

20

2. Using only the 10 DCT coefficients shown in FIGURE 1b, gives the approximation equation 2 for progressive-scan sequences

$$f(x,y) \approx \frac{2}{N} \left[ \begin{aligned} & \frac{1}{2} DCT_{0,0} + \frac{1}{\sqrt{2}} DCT_{1,0} \cos \frac{(2x+1)\pi}{2N} + \\ & \frac{1}{\sqrt{2}} DCT_{2,0} \cos \frac{(2x+1)2\pi}{2N} + \frac{1}{\sqrt{2}} DCT_{3,0} \cos \frac{(2x+1)3\pi}{2N} + \\ & \frac{1}{\sqrt{2}} DCT_{0,1} \cos \frac{(2y+1)\pi}{2N} + DCT_{1,1} \cos \frac{(2x+1)\pi}{2N} \cos \frac{(2y+1)\pi}{2N} + \\ & \frac{1}{\sqrt{2}} DCT_{0,2} \cos \frac{(2y+1)2\pi}{2N} + DCT_{2,1} \cos \frac{(2x+1)2\pi}{2N} \cos \frac{(2y+1)\pi}{2N} + \\ & DCT_{1,2} \cos \frac{(2x+1)\pi}{2N} \cos \frac{(2y+1)2\pi}{2N} + \frac{1}{\sqrt{2}} DCT_{0,3} \cos \frac{(2y+1)3\pi}{2N} \end{aligned} \right] \quad (2)$$

25

3. Using only the 10 DCT coefficients shown in FIGURE 1c, gives the approximation equation 3 for interlaced-scan sequences

$$f(x,y) \approx \frac{2}{N} \left[ \begin{aligned} & \frac{1}{2} \text{DCT}_{0,0} + \frac{1}{\sqrt{2}} \text{DCT}_{1,0} \cos \frac{(2x+1)\pi}{2N} + \frac{1}{\sqrt{2}} \text{DCT}_{2,0} \cos \frac{(2x+1)2\pi}{2N} + \\ & \frac{1}{\sqrt{2}} \text{DCT}_{0,1} \cos \frac{(2y+1)\pi}{2N} + \text{DCT}_{1,1} \cos \frac{(2x+1)\pi}{2N} \cos \frac{(2y+1)\pi}{2N} + \\ & \frac{1}{\sqrt{2}} \text{DCT}_{0,2} \cos \frac{(2y+1)2\pi}{2N} + \frac{1}{\sqrt{2}} \text{DCT}_{0,3} \cos \frac{(2y+1)3\pi}{2N} + \\ & \frac{1}{\sqrt{2}} \text{DCT}_{0,4} \cos \frac{(2y+1)4\pi}{2N} + \frac{1}{\sqrt{2}} \text{DCT}_{0,5} \cos \frac{(2y+1)5\pi}{2N} + \\ & \frac{1}{\sqrt{2}} \text{DCT}_{0,6} \cos \frac{(2y+1)6\pi}{2N} \end{aligned} \right] \quad (3)$$

4. Let the right-hand side of each of equations 2 and 3 be denoted  $f'(x,y)$ . In the case of a progressive scan (i.e., the progressive\_sequence flag is 1), the base-layer value  $g_1'(x,y)$  is computed in accordance with the following equation 4 and the enhancement-layer value  $g_0'(x,y)$  is computed in accordance with the following equation 5:

$$g_1'(x,y) = \frac{1}{4} \left[ f'(2x,2y) + f'(2x+1,2y) + f'(2x,2y+1) + f'(2x+1,2y+1) \right] \quad (4)$$

for  $x = 0, \dots, 3; y = 0, \dots, 3$ .

$$g_0'(x,y) = \frac{1}{4} \left[ f'(2x,y) + f'(2x+1,y) - f'(2x,y+1) - f'(2x+1,y+1) \right] \quad (5)$$

for  $x = 0, \dots, 3; y = 0, 2, 4, 6$ .

More specifically,  $g_1'(x,y)$  in equation 4 defines the average value of the values of a set of 4 contiguous pixels (or prediction errors) arranged in a 2x2 block portion of the full-resolution 8x8 block. The value  $g_0'(x,y)$  in equation 5 defines the difference between the average value of the values of a first set of 2 contiguous horizontal pixels (or prediction errors) of one vertical line and the average value of the values of a second set of 2 contiguous horizontal pixels (or prediction errors) of the following vertical line arranged in a 2x2 block portion of the full-resolution 8x8 block. The 16 equations  $g_1(0,0)$  to  $g_1(3,3)$  of the above "Progressive-Scan, Base-layer Set of Decimated Pixel Values" were derived by substituting equation 2 into equation 4, substituting numeric values for  $x$  and  $y$  in  $g_1'(x,y)$ , substituting  $N = 8$ , and approximating the weighting factors for the DCT coefficients with rational values. The 16 equations  $g_0(0,0)$  to  $g_0(3,6)$  of the above "Progressive-Scan, Enhancement-layer Set of Decimated Pixel Values" were derived in a similar manner by substituting equation 2 into equation 5, substituting numeric values for  $x$  and  $y$  in  $g_0'(x,y)$ , substituting  $N =$

8, and approximating the weighting factors for the DCT coefficients with rational values. Although the effective pixel decimation of the enhancement-layer is only 2 (rather than being the effective pixel decimation of 4 of the base-layer), the equalities  $g_0(x, y+1) = -g_0(x, y)$  hold for  $y = 0, 2, 4, 6$ , so that enhancement-layer values with odd vertical indexes need not be computed. Thus, only 16 independent  $g_0(x, y)$  enhancement-layer values need be computed for each 8x8 luma block in a progressive-scan I or P picture. Further, because these 16  $g_0(x, y)$  enhancement-layer values are residual values, they tend to have a small dynamic range.

In the case of an interlaced scan (i.e., the progressive\_sequence flag is 0), the base-layer value  $g_1'(x, y)$  is computed in accordance with the following equation 6 and the enhancement-layer value  $g_0'(x, y)$  is computed in accordance with the following equation 7:

$$g_1'(x, y) = \frac{1}{4} [f'(4x, y) + f'(4x+1, y) + f'(4x+2, y) + f'(4x+3, y)] \quad (6)$$

for  $x = 0, 1; y = 0, \dots, 7$ .

$$g_0'(x, y) = \frac{1}{4} [f'(2x, y) + f'(2x+1, y) - f'(2x+2, y) - f'(2x+3, y)] \quad (7)$$

for  $x = 0, 2; y = 0, \dots, 7$ .

In the interlaced-scan case of an 8x8 block,  $g_1'(x, y)$  in equation 6 defines the average value of the values of a set of 4 contiguous pixels (or prediction errors) arranged in a 4x1 block portion of the 8x8 block. The value  $g_0'(x, y)$  in equation 7 defines the difference between the average value of the values of a first set of 2 contiguous horizontal pixels (or prediction errors) of a vertical line and the average value of the values of a second set of the next 2 contiguous horizontal pixels (or prediction errors) of the same vertical line arranged in a 4x1 block portion of an 8x8 block. The 16 equations  $g_1(0, 0)$  to  $g_1(1, 7)$  of the above "Interlaced-Scan, Base-layer Set of Decimated Pixel Values" were derived by substituting equation 3 into equation 6, substituting numeric values for  $x$  and  $y$  in  $g_1'(x, y)$ , substituting  $N = 8$ , and approximating the weighting factors for the DCT coefficients with rational values. The 16 equations  $g_0(0, 0)$  to  $g_0(2, 7)$  of the above "Interlaced-Scan, Enhancement-layer Set of Decimated Pixel Values" were derived in a similar manner by substituting equation 3 into equation 7, substituting numeric values for  $x$  and  $y$  in  $g_0'(x, y)$ , substituting  $N = 8$ , and approximating the weighting factors for the DCT coefficients with rational values. Although the effective pixel decimation of the enhancement-layer is

only 2 (rather than the effective pixel decimation of 4 of the base-layer), the equalities  $g_0(x+1,y) = -g_0(x,y)$  hold for  $x = 0$  and  $x = 2$  so that enhancement-layer values with odd horizontal indexes need not be computed. Thus, only 16 independent  $g_0(x,y)$  enhancement-layer values need be computed for each 8x8 luma block in an interlaced-scan I or P picture. Further, because these 16  $g_0(x,y)$  enhancement-layer values are residual values, they tend to have a small dynamic range.

Returning to FIGURE 2, unit 204 conveys an output comprising successive 8x8 blocks of I, P and B luma and chroma  $g_1(x,y)$  base-layer decimated pixel values as a first input to base-layer adder 205B in a predetermined order. (For non-coded blocks all such values are zero). This predetermined order includes the decimated pixel values of each 2x2 array of 8x8 pixel luma blocks and each of two chroma blocks which form a decimated macroblock for use by enhanced MCU processing means 208. Further, unit 208 applies a corresponding block  $p_1(x,y)$  of base-layer decimated pixel values as a second input to base-layer adder 205B in this same predetermined order (For intra-coded macroblocks all such values are zero). The block  $s_1(x,y)$  of base-layer decimated pixel values derived as a sum output from base-layer adder 205B are then stored in memory 206.

Unit 204 conveys an output comprising the I and P luma  $g_0(x,y)$  enhancement-layer decimated pixel values as a first input to enhancement-layer adder 205E in the previously mentioned decimated-pixel macroblock predetermined order. (For non-coded blocks all such values are zero). Further, for the case of P luma pixels, unit 208 applies a corresponding macroblock of 64  $p_0(x,y)$  enhancement-layer decimated pixel values as a second input to adder 205E in this same predetermined order. (For intra-coded macroblocks all such values are zero). The macroblock of 64  $s_0(x,y)$  enhancement-layer decimated pixel values derived as a sum output from adder 205E are applied as an input to enhancement-layer encoder 207 and then the encoded output bit-words from encoder 207 are stored in memory 206 during decoding of I and P pictures.

A macroblock at the higher resolution of the enhancement-layer would normally comprise 128 decimated luma pixel values. However, because of the above-described symmetry equalities for both progressive-scan sequences and interlaced-scan sequences, the number of independent decimated enhancement-layer pixel values in the block  $s_0(x,y)$  is reduced from 128 to 64. Therefore, the predetermined order is such that only half of the enhancement-layer decimated pixel values need be considered by enhancement-layer encoder 207. These enhancement-layer values are encoded in pairs

using a simple vector quantizer, with each pair of values being represented by an 8-bit codeword. Since there are 64 enhancement-layer values to be encoded in a macroblock, the number of bits of storage for the enhancement layer is  $32 \times 8 = 256$  bits per macroblock. In the preferred embodiment the 32 codewords are combined into two  
 5 128-bit output words from encoder 207 for storage in memory 206.

For progressive sequences each pair of horizontally adjacent values in the block  $s_0(x,y)$  is encoded as a two-dimensional vector, whereas for interlaced sequences each pair of vertically adjacent (within the same field) values in  $s_0(x,y)$  is encoded as a two-dimensional vector. Let  $v_0$  and  $v_1$  be a pair of values to be encoded together. The  
 10 computational procedure employed by encoder 207 to encode the pair  $v_0, v_1$  is described in detail in Appendix A. After this procedure has been completed for each pair of values in  $s_0(x,y)$ , the codewords are packed into two 128-bit words, both of which 128-bit words form the output from encoder 207 that are stored in memory 206.

Returning again to FIGURE 2, memory 206 provides (1) a base-layer output  $d_1(x,y)$  to unit 208 ( $d_1(x,y)$  is similar in content to the base-layer input  $s_1(x,y)$  provided to memory 206) and (2) an enhancement-layer output to unit 208 (similar in content to the enhancement-layer input to memory 206).  
 15

In order for enhanced MCU processing means 208 to form a block of predictions, a block of pixel values is fetched from memory 206. The base-layer of pixel values which are read from the stored reference picture are denoted  $d_1(x,y)$ . The enhancement-layer residual values, which are needed only if the block of predictions being formed is for the luma component in a P picture, are denoted  $d_0(x,y)$ . Since the enhancement-layer samples are stored in memory 206 in encoded form, the enhancement-layer data output from memory 206 input to unit 208 is decoded by  
 20 enhancement-layer decoder 300 (Figure 3) to obtain the  $d_0(x,y)$  values. Unit 208 separately forms individual luma or chroma outputs for field prediction operations corresponding to the top and bottom field prediction blocks. In a bi-directionally predicted macroblock these operations are performed separately for the forward and backward predictions and the results are combined as described in the ISO 13818-2  
 25 standard. In the following detailed description of the computational-processing operations performed by unit 208, the symbol / represents integer division with truncation of the result toward minus infinity, the symbol // represents integer division with truncation of the result toward zero, and the symbol % represents the modulus operator, which is defined such that if  $x$  is a negative number and  $M$  is a positive  
 30 number, then  $x \% M = M - ((x/M) * M - x)$ .  
 35

Before a block of samples can be read from memory 206, the location and size of the block is determined. The location of a block of pixel values in the reference



- picture is specified by the horizontal and vertical coordinates of the start (i.e., the upper-left corner) of the block in the reference picture. For the base-layer, these coordinates are indexes into a picture which is 1/4 horizontal, full vertical resolution for interlaced sequences and 1/2 horizontal, 1/2 vertical resolution for progressive sequences. For the enhancement-layer, the coordinates are indexes into a picture which is 1/2 horizontal, full vertical resolution for both interlaced and progressive sequences.

- To locate the blocks  $d_1(x,y)$  and  $d_0(x,y)$  in the reference picture, the motion vector for the macroblock being decoded is needed. The decoding of motion vector data in the bitstream, the updating of motion vector predictors, and the selection of motion vectors in non-intra macroblocks which contain no coded motion vectors (e.g., skipped macroblocks) are all performed by unit 208 as described in the ISO 13818-2 standard. Let  $x_b$  and  $y_b$  be the full-resolution horizontal and vertical positions of the macroblock being decoded and let  $mv=(dx,dy)$  be the decoded motion vector, so that if the sequence were being decoded at full resolution, a block of pixel values at location  $(x_b+(dx/2), y_b+(dy/2))$  in the full-resolution reference luma picture would be read from memory and used to form luma predictions. Similarly, a block of chroma values at location  $(x_b/2+(dx//2), y_b/2+(dy//2))$  in the reference chroma picture would be needed to form predictions for each of the 2 chroma components in a full-resolution mode.

- The location in the reference picture of a block needed for motion compensation in unit 208 is determined using  $x_b$ ,  $y_b$ ,  $dx$  and  $dy$ . Table 3, shows the locations of blocks for various prediction modes. The sizes of the blocks needed for motion compensation in unit 208 are specified in Table 4. Base-layer entries in Table 4 give the size of the block  $d_1(x,y)$ , and enhancement-layer entries in Table 4 give the size of the block  $d_0(x,y)$ .

Prediction Mode	Horizontal Coordinate	Vertical Coordinate
Progressive sequence, luma, base-layer	$((x_b+(dx/2))/8)*4$	$(y_b+(dy/2))/2$
Progressive sequence, luma, enhancement-layer	$((x_b+(dx/2))/8)*4$	$((y_b+(dy/2))/2)*2$
Progressive sequence, chroma	$x_b/4+((dx/2)/4)$	$y_b/4+((dy/2)/4)$
Interlaced sequence, luma, base-layer	$((x_b+(dx/2))/8)*2$	$y_b+(dy/2)$
Interlaced sequence, luma, enhancement-layer	$((x_b+(dx/2))/8)*4$	$y_b+(dy/2)$
Interlaced sequence, chroma	$x_b/8+((dx/2)/8)$	$y_b/2+((dy/2)/2)$

Table 3-Locations of Blocks Needed for Motion Compensation  
in Enhanced MCU Processing Means 208

Prediction Mode	Horizontal Size	Vertical Size
Progressive sequence, luma, base-layer	12	9
Progressive sequence, luma, enhancement-layer	12	18
Progressive sequence, chroma	5	5
Interlaced sequence, luma, 16x16 prediction, base-layer	6	17
Interlaced sequence, luma, 16x8 prediction, base-layer	6	9
Interlaced sequence, luma, 16x16 prediction, enhancement-layer	12	17
Interlaced sequence, luma, 16x8 prediction, enhancement-layer	12	9
Interlaced sequence, chroma, 8x8 prediction	3	9
Interlaced sequence, chroma, 8x4 prediction	3	5

Table 4-Sizes of Blocks Needed for Motion Compensation  
in Enhanced MCU Processing Means 208

Figure 3 shows the processing performed on the luma samples read from memory 206 by unit 208. As shown in Figure 3, the luma-processing portion of unit 208 comprises enhancement-layer decoder means 300, enhancement-layer pixel reconstruction means 302, DCT-based upsample means 304, full-resolution block select means 306, DCT-based downsample means 308 and two-layer output formation means 310. These elements of enhanced MCU processing means 208 use the reduced-resolution blocks from I and P frames stored in memory 206 to form predictions for a decoded macroblock.

The above-described structure of Figure 3 performs computational processing of luma pixel values input to unit 208 from memory 206. This computational process is described in detail in appendices B to G. Briefly, however, decoder 300 unpacks the input 128-bit words into 16 constituent 8-bit codewords. Decoder 300, employing the computational processing described in appendix B, derives  $d_0(x,y)$  as an output. Enhancement-layer pixel reconstruction means 302, employing the computational processing described in appendix C, derives  $r_0(x,y)$  as an output in response to both the  $d_1(x,y)$  input to unit 208 and the  $d_0(x,y)$  output from decoder 300. DCT-based upsample means 304, employing the computational processing described in appendix D, horizontally upsamples the  $r_0(x,y)$  input to derive  $r(x,y)$  at full resolution. Full-resolution block select means 306, employing the computational processing described in appendix E, uses  $r(x,y)$  to derive a full-resolution block of predictions  $p(x,y)$  as an output. DCT-based downsample means 308, employing the computational processing described in appendix F, horizontally downsamples the  $p(x,y)$  input to derive  $q(x,y)$  at half horizontal resolution. The block  $q(x,y)$  is applied as an input to two-layer output formation means 310, which employs the computational processing described in appendix G, to derive the outputs  $p_1(x,y)$  and  $p_0(x,y)$  provided by unit 208 to adders 205B and 205E shown in FIGURE 2. Although the computational processing required for chroma predictions are not shown in FIGURE 3, they are described in detail in appendix H.

Returning again to FIGURE 2, a video signal comprising the base-layer pixels defining each of successive picture fields or frames is output from memory 206 and input to sample-rate converter 210 which derives a display video signal output. The display video signal output from unit 210 represents a PIP display image. By way of example, assume that the size of a PIP display is intended to occupy 1/3 of the horizontal dimension and 1/3 of the vertical dimension of the entire HD display size. If the original resolution of the HD bit-stream is 1920x1080 interlaced, then the PIP decoded frames (in which the number of pixels in the horizontal direction has been decimated by a factor of 3/4) are 480x1080 interlaced. Assuming a 1920x1080 interlaced HD display, the displayed PIP frames should be 640x360 interlaced. Therefore, in this example, the decoded frames stored in memory must be scaled by sample-rate converter 210 by a factor of 4/3 in the horizontal direction and 1/3 in the vertical direction.

In a realized embodiment of the present invention, the extra capacity required in memory for storage of the 1/2 resolution enhancement-layer in encoded form adds only 1.98 Mbits to the 17.8 Mbits required for storage of the 1/4 resolution base-layer. Thus, the inclusion of an encoded 1/2 resolution enhancement-layer increases the

RCA 89,541

19

needed storage capacity of the base and enhancement-layer decimated-pixel memory by a relatively small amount (i.e., only a little more than 11%) to 19.78 Mbits.

668667 2233400

## APPENDIX A

## Enhancement-layer Encoder 207

- 5 In the following procedure, used to encode each pair of enhancement-layer values  $v_0, v_1$ , the symbol "DIV" represents integer division with rounding of the result to the nearest integer.

First, the values  $v_0$  and  $v_1$  are clipped to the range  $[-45, 45]$ . Then the 8-bit codeword  $C$  is computed as shown in the following pseudocode:

```

10   if ( $v_0 > -4$  AND  $v_0 < 4$  AND  $v_1 > -4$  AND  $v_1 < 4$ )
       $C = 7 * (v_1 + 3) + v_0 + 211$ 
      else
          if ( $v_1 < v_0 - 25$ )
               $v_0 = (v_0 + v_1 + 25) / 2$ 
               $v_1 = v_0 - 25$ 
          else if ( $v_1 > v_0 + 25$ )
               $v_0 = (v_0 + v_1 - 25) / 2$ 
               $v_1 = v_0 + 25$ 
           $v_0 = 5 * (v_0 \text{ DIV } 5)$ 
           $v_1 = 5 * (v_1 \text{ DIV } 5)$ 
           $C = 104 - 2 * v_1 - v_0 / 5$ 
20

```

The codeword  $C$  is the value stored in memory to represent the pair  $v_0, v_1$ .

## APPENDIX B

## Enhancement-layer Decoder 300

5 After a 128-bit enhancement-layer word read out from base and enhancement-layer memory 206 has been unpacked into 16 separate 8-bit codewords, each codeword can be decoded as described below. Let  $C$  be a codeword to be decoded and let  $b_0$  and  $b_1$  be the values to be obtained by decoding  $C$ . Then the following pseudocode shows how  $b_0$  and  $b_1$  should be computed:

10       if ( $C < 204$ )  
           $b_0 = 70 - 5*(C/11) - 5*(C\%11)$   
           $b_1 = 45 - 5*(C/11)$   
      else  
           $b_0 = (C - 208)\%7 - 3$   
15        $b_1 = (C - 208)/7 - 3$

20 Each decoded codeword is used to fill in a portion of  $d_0(x,y)$ . For progressive sequences, lines of  $d_0(x,y)$  which come from odd-indexed lines in the reference picture are obtained by negating the appropriate decoded codeword values. Similarly, for interlaced sequences, columns of  $d_0(x,y)$  which come from odd-indexed columns in the reference picture are obtained by negating the appropriate decoded codeword values.

## APPENDIX C

## Enhancement-layer Pixel Reconstruction Means 302

Using the block  $d_0(x,y)$  output from enhancement-layer decoder 300 and block  
 5  $d_1(x,y)$  read out from base and enhancement-layer memory 206, the pixel values at the  
 enhancement-layer resolution (i.e.,  $\frac{1}{2}$ -horizontal, full vertical resolution) can be  
 reconstructed for both P pictures and B pictures. For P pictures  $d_0(x,y)$  is obtained as  
 described in Appendix B; for B pictures  $d_0(x,y)$  is assumed to be 0 for all  $x$  and  $y$ .

The equations used to combine the 2 layers for progressive sequences are given  
 10 by

$$\begin{aligned} r_0(x, 2y) &= d_1(x, y) + d_0(x, 2y) \\ r_0(x, 2y + 1) &= d_1(x, y) + d_0(x, 2y + 1) \end{aligned}$$

15 for  $x = 0, \dots, 11, y = 0, \dots, 8$ .

The equations used to combine the 2 layers for interlaced sequences are given  
 by

$$\begin{aligned} r_0(2x, y) &= d_1(x, y) + d_0(2x, y) \\ r_0(2x + 1, y) &= d_1(x, y) + d_0(2x + 1, y) \end{aligned}$$

where  $x = 0, \dots, 5; y = 0, \dots, 8$  for 16x8 prediction and  $x = 0, \dots, 5; y = 0, \dots, 16$  for 16x16  
 prediction.

The block  $r_0(x,y)$ , obtained using the above equations, contains the  
 25 enhancement-layer pixels at one-half horizontal resolution, so that the enhancement-  
 layer pixels still need to be upsampled by a factor of 2 horizontally to reach full  
 resolution.

## APPENDIX D

## DCT-Based Upsample Means 304

5 DCT-based upsample means 304 linearly transforms the 12 input pixel values  
 in each row of  $r_0(x,y)$ , to 24 output pixel values representing each row of  $r(x,y)$  at full  
 resolution. As shown in FIGURE 4, the 12 pixel values in a row are computationally  
 processed in 3 groups of 4, where the 12 input pixel values are divided into 3 groups  
 $W_1$ ,  $W_2$  and  $W_3$ . For each of the 3 groups, the DCT is a 4-point DCT, followed by a  
 zero pad that adds 4 zeros to the end of that 4-point DCT output to result in an 8-point  
 10 output from that zero pad. The IDCT for each of the 3 groups is an 8-point IDCT,  
 which results in the 24 output pixel values representing each row of  $r(x,y)$  at full  
 resolution comprising 3 groups  $Z_1$ ,  $Z_2$  and  $Z_3$ , wherein the output pixel values for each  
 of the 3 groups consists of 8 pixel values.

15 The linear transformation shown in Figure 4 can be computationally  
 implemented as 3 matrix-vector multiplications, given by the equations  $Z_j = (1/64)AW_j$   
 for  $j = 1, 2$ , and  $3$ , where

$$A = \begin{bmatrix} 76 & -18 & 8 & -2 \\ 47 & 23 & -9 & 3 \\ 12 & 60 & -11 & 3 \\ -6 & 56 & 18 & -4 \\ -4 & 18 & 56 & -6 \\ 3 & -11 & 60 & 12 \\ 3 & -9 & 23 & 47 \\ -2 & 8 & -18 & 76 \end{bmatrix}$$

20 The result of performing this linear transformation on each row of input pixel  
 values in  $r_0(x,y)$  is the block of  $r(x,y)$  output pixel values at full resolution.



A final 16x16 or 16x8 full-resolution block of predictions, denoted  $p(x,y)$ , must be obtained from  $r(x,y)$ , using the motion vector  $(dx,dy)$  to select a subset of the pixels in  $r(x,y)$ , with half-pixel interpolation if necessary. More specifically, if the upper-left pixel in  $r(x,y)$  has coordinates (0,0) and the coordinates of  $r(x,y)$  are specified with half-pixel precision, then the upper left corner of the final prediction block is  $r(dx\%16,dy\%4)$  for progressive sequences and  $r(dx\%16,dy\%2)$  for interlaced sequences. Since the coordinates of  $r(x,y)$  are specified with half-pixel precision, odd values of  $dx\%M$  or  $dy\%M$  (for  $M = 2,4,16$ ) imply that half-pixel interpolation, as described in the ISO 13818-2 standard, must be performed.

## APPENDIX F

## DCT-Based Downsample Means 308

5 DCT-based downsample means 308 linearly transforms each row of  $p(x,y)$  from  
 16 pixels to 8 pixels. As shown in FIGURE 5, the 16-pixel row is first divided into two  
 groups of 8 pixels,  $U_1$  and  $U_2$ . For each of the 2 groups, the DCT is an 8-point DCT,  
 followed by a truncation which discards the last 4 points in the DCT. The IDCT for  
 each of the 2 groups is a 4-point IDCT, which results in the 8 output pixel values  
 representing each row of  $q(x,y)$  at one-half resolution comprising 2 groups  $V_1$  and  $V_2$ ,  
 10 wherein the output pixel values for each of the 2 groups consists of 4 pixel values. The  
 computationally-processed output of DCT-based downsample means 308 shown in  
 FIGURE 5 is a set of 8 pixels, formed from the concatenation of  $V_1$  and  $V_2$ .

The linear transformation shown in Figure 5 can be computationally  
 implemented as 2 matrix-vector multiplications, given by the equations  $Z_j = BU_j$  for  $j =$   
 15 1 and 2, where

$$B = \begin{bmatrix} 38 & 23 & 6 & -3 & -2 & 2 & 1 & -1 \\ -9 & 12 & 30 & 28 & 9 & -6 & -4 & 4 \\ 4 & -4 & -6 & 9 & 28 & 30 & 12 & -9 \\ -1 & 1 & 2 & -2 & -3 & 6 & 23 & 38 \end{bmatrix}$$

20 The result of performing this linear transformation on each row of input pixel  
 values in  $p(x,y)$  at full resolution is the block of  $q(x,y)$  output pixel values at one-half  
 horizontal resolution.

## APPENDIX G

## Two-Layer Output Formation Means 310

In the following procedure, the symbol "DIV" represents integer division with  
 5 rounding of the result to the nearest integer. The base-layer output of the MCU, denoted  $p_1(x,y)$ , is obtained for progressive sequences using the equation

$$p_1(x,y) = (q(x,2y) + q(x,2y+1)) \text{ DIV } 128$$

10 for  $x = 0, \dots, 7; y = 0, \dots, 7$ .

The base-layer output of the MCU, denoted  $p_1(x,y)$ , is obtained for interlaced sequences using the equation

$$p_1(x,y) = (q(2x,y) + q(2x+1,y)) \text{ DIV } 128$$

15

for  $x = 0, \dots, 3; y = 0, \dots, 7$  for 16x8 prediction and  $x = 0, \dots, 3; y = 0, \dots, 15$  for 16x16 prediction.

The enhancement-layer output of the MCU, denoted  $p_0(x,y)$  and computed only for P pictures, is obtained for progressive sequences using the equation

20

$$p_0(x,y) = (q(x,y) - q(x,y+1)) \text{ DIV } 128$$

for  $x = 0, \dots, 7; y = 0, 2, 4, \dots, 12, 14$ .

The enhancement-layer output of the MCU, denoted  $p_0(x,y)$  and computed only  
 25 for P pictures, is obtained for interlaced sequences using the equation

$$p_0(x,y) = (q(x,y) - q(x+1,y)) \text{ DIV } 128$$

30

for  $x = 0, 2, 4, 6; y = 0, \dots, 7$  for 16x8 prediction and  $x = 0, 2, 4, 6; y = 0, \dots, 15$  for 16x16 prediction.

As shown in FIGURE 2, the MCU base-layer output  $p_1(x,y)$  is applied as an input to adder 205B and the MCU enhancement-layer output  $p_0(x,y)$  is applied as an input to adder 205E.

## APPENDIX H

## Forming Block of Predictions for the Chroma Component

In the following procedure, the symbol "DIV" represents integer division with  
 5 rounding of the result to the nearest integer. If the block of predictions being formed is  
 for the chroma component, then the samples  $d_1(x,y)$  are upsampled to full resolution  
 using a pixel repeat operation. Then the final full resolution  $8 \times 8$  or  $8 \times 4$  block of  
 predictions is selected using the motion vector  $(dx,dy)$ , with half-pixel interpolation, if  
 necessary. Finally, the full-resolution predictions are downsampled to provide base-  
 10 layer predictions to be stored in base and enhancement-layer memory 206.

The pixel repeat operation, which transforms the base-layer block  $d_1(x,y)$  to the  
 full-resolution block  $r(x,y)$ , is performed for progressive sequences using the equation

$$r(x,y) = d_1(x/2,y/2)$$

15

for  $x = 0, \dots, 9; y = 0, \dots, 9$ .

The pixel repeat operation, which transforms the base-layer block  $d_1(x,y)$  to the  
 full-resolution block  $r(x,y)$ , is performed for interlaced sequences using the equation

20

$$r(x,y) = d_1(x/4,y)$$

for  $x = 0, \dots, 11; y = 0, \dots, 4$  for  $8 \times 4$  prediction and  $x = 0, \dots, 11; y = 0, \dots, 8$  for  $8 \times 8$   
 prediction.

The final  $8 \times 8$  or  $8 \times 4$  full-resolution block  $p(x,y)$  is obtained from  $r(x,y)$ . The  
 25 upper-left corner of this final block is  $r((dx//2)\%4,(dy//2)\%4)$  for progressive  
 sequences and  $r((dx//2)\%8,(dy//2)\%2)$  for interlaced sequences. Odd values of  
 $(dx//2)\%M$  or  $(dy//2)\%M$  (for  $M = 2,4,8$ ) imply half-pixel interpolation is necessary.

The base-layer prediction block  $p_1(x,y)$  is obtained by downsampling  $p(x,y)$ .  
 For progressive sequences the equation used to perform this downsampling is

30

$$p_1(x,y) = (p(2x,2y) + p(2x + 1,2y) + (p(2x,2y + 1) + p(2x + 1,2y + 1)) \text{ DIV } 4$$

for  $x = 0, \dots, 3; y = 0, \dots, 3$ . For interlaced sequences the equation used to perform this  
 downsampling is

35

$$p_1(x,y) = (p(4x,y) + p(4x + 1,y) + p(4x + 2,y) + p(4x + 3,y)) \text{ DIV } 4$$

for  $x = 0, 1$ ;  $y = 0, \dots, 3$  for 8x4 prediction and  $x = 0, 1$ ;  $y = 0, \dots, 7$  for 8x8 prediction.

As shown in FIGURE 2, the MCU base-layer output  $p_1(x,y)$  is applied as an input to adder 205B.

## WHAT IS CLAIMED IS:

1. In apparatus for decoding compressed image data including frequency domain coefficients defining blocks of pixel values representing an image at a first resolution to provide an image at a reduced second resolution for display, said apparatus comprising:

first means responsive to a selected sub-set of said frequency domain coefficients for deriving said image of said reduced second resolution for display and including,

enhanced motion-compensation-unit (MCU) processing means; and

second means for operating said enhanced MCU processing means with blocks of pixel values representing said image at an intermediate third resolution lower than said first resolution and higher than said reduced second resolution.

2. The apparatus defined in Claim 1, wherein said reduced second resolution is substantially 1/4 of said first resolution; and

said second means operates said enhanced MCU processing at an intermediate third resolution which is substantially 1/2 of said first resolution.

3. The apparatus defined in Claim 1, wherein said image at said reduced second resolution for display is a progressive-scanned image.

4. The apparatus defined in Claim 1, wherein said image at said reduced second resolution for display is an interlaced-scanned image.

5. The apparatus defined in Claim 1, wherein:  
said enhanced MCU processing means is responsive to base-layer pixel macroblock input values representing said image at said reduced second resolution and to pixel values representing said image at said intermediate third resolution for deriving motion-compensated base-layer prediction macroblock output pixel values as a first output and motion-compensated enhancement-layer prediction macroblock output pixel residual values as a second output.

6. The apparatus defined in Claim 5, wherein:

5 said second means comprises third means responsive to said selected sub-set of said frequency domain coefficients and to both said motion-compensated base-layer macroblock output pixel values and said enhancement-layer macroblock output pixel residual values for deriving both said base-layer macroblock input pixel values and said encoded enhancement-layer macroblock input pixel residual values.

7. The apparatus defined in Claim 1, wherein said second means comprises:

10 a base and enhancement-layer decimated-pixel memory;  
unitary enhanced inverse discrete cosine transform (IDCT), filtering and pixel-decimation processing means responsive to a selected sub-set of frequency domain coefficients for deriving base-layer blocks of output pixel values representing said image at said reduced second resolution as a first output and output enhancement-  
15 layer blocks of output pixel residual values representing said image at said intermediate third resolution as a second output;

fourth means, including a first adder for adding corresponding pixel values of said motion-compensated base-layer macroblock output pixel values from said enhanced MCU processing means and said base-layer blocks of output pixel values from said unitary IDCT, filtering and pixel-decimation processing means, for  
20 deriving values that are stored as base-layer data in said base and enhancement-layer decimated-pixel memory;

fifth means, including a second adder and an enhancement-layer encoder, for adding corresponding pixel residual values of said motion-compensated enhancement-layer macroblock output pixel residual values from said enhanced MCU  
25 processing means to said enhancement-layer blocks of output pixel residual values from said unitary IDCT, filtering and pixel-decimation processing means to obtain a sum output from said second adder for encoding by said enhancement-layer encoder, for deriving second input values that are stored as encoded enhancement-layer data in  
30 said base and enhancement-layer decimated-pixel memory; and

sixth means for providing from said base and enhancement-layer decimated-pixel memory said base-layer pixel macroblock input values to said enhanced MCU processing means and for deriving said encoded enhancement-layer pixel macroblock input residual values applied as a second input to said enhanced  
35 MCU processing means from said stored encoded enhancement-layer data.

8. The apparatus defined in Claim 1, wherein:

said frequency domain coefficients define image information that includes luma blocks of pixel values representing intracoded (I) and predictive-coded (P) progressive-scanned images at said first resolution.

5

9. The apparatus defined in Claim 7, including:

seventh means comprising a sample-rate converter for deriving an ongoing display video signal from base-layer blocks of output pixel values.

10

10. The apparatus defined in Claim 1, wherein:

said reduced second resolution is substantially  $1/4$  of said first resolution; and

said intermediate third resolution is substantially  $1/2$  of said first resolution.

15

11. In a system for decoding compressed image data in the form of pixel blocks representing an image at a first resolution to provide an image of a reduced second resolution, a method comprising the steps of decompressing a pixel block of said first resolution by:

20

selecting a sub-set of frequency domain coefficients in said pixel blocks of said compressed image data;

processing elements of said sub-set of frequency domain coefficients to provide pixel data representing pixels comprising a spatially distributed sub-set of pixels in a pixel block of said image at a first resolution and excluding other pixels of that pixel block, said processing including

25

using data at an intermediate third resolution, lower than said first resolution but higher than said reduced second resolution, to supplement data from said reduced second resolution in forming predictions for motion compensation; and

30

formatting said pixel data representing pixels comprising said spatially distributed sub-set of pixels to provide said image of said reduced second resolution.

12. A method according to claim 11 including the step of,

selecting different spatially distributed sub-sets of pixels for interlace and progressive image output.

35



13. A method according to claim 11 wherein said formatting step comprises,

5       upsampling said pixel data representing pixels comprising a spatially distributed sub-set of pixels to provide said image of said reduced second resolution.

14. A method according to claim 11 wherein said processing step includes the step of,

10       selecting said spatially distributed sub-set of pixels based on desired PIP picture characteristic.

15       15. A method according to claim 14 wherein said PIP picture characteristic comprises at least one of (a) PIP picture size, (b) whether said PIP picture is interlace or progressive, and (c) PIP picture vertical and horizontal pixel resolution.

16. A method according to claim 11 wherein said formatting step includes the step of,

20       adaptively filtering pixel data representing pixels comprising a spatially distributed sub-set of pixels using a filter function selected based on at least one of, (a) motion vector type, (b) group of picture (GOP) structure, (c) a GOP boundary transition, (d) whether I, B or P frame, and (e) whether interlace or progressive frame reduced second resolution output required.

25       17. A method according to claim 11 wherein said formatting step includes the step of,

30       adaptively filtering pixel data representing pixels comprising a selected spatially distributed sub-set of pixels using a filter function selected from at least one of, (a) a vertical pixel data filter, (b) a horizontal pixel data filter, (c) a chrominance data filter, and (d) luminance data filter.

18. In a system for decoding compressed image data in the form of pixel blocks representing an image of a first resolution to provide an image of a reduced second resolution, a method comprising the steps of:

5       generating data representative of an image pixel block at an intermediate third resolution lower than said first resolution but higher than said reduced second resolution;

          generating motion compensated pixel block data at said third resolution from pixel block data of said reduced second resolution supplemented by said intermediate third resolution data; and

10       deriving pixel data representing said image of said reduced second resolution from said motion compensated pixel block data at said third resolution.

15       19. A method according to claim 18 wherein the steps of claim 18 are performed for P frames exclusively of I and B frames.

20       20. A method according to claim 18 wherein the steps of claim 18 are performed for P frames and one of, (a) I frames and (b) B frames.

25       21. A method according to claim 18 including the step of upsampling said pixel block data at said third resolution to provide image data of said first resolution.

30       22. A method according to claim 21 including the step of downsampling said upsampled pixel block data of said first resolution to provide image data of said second resolution.

35       22. A method according to claim 21 including the step of downsampling said upsampled pixel block data of said first resolution to provide said intermediate third resolution data.

40       23. A method according to claim 18 wherein said pixel block data of said third resolution comprises residual data.

5

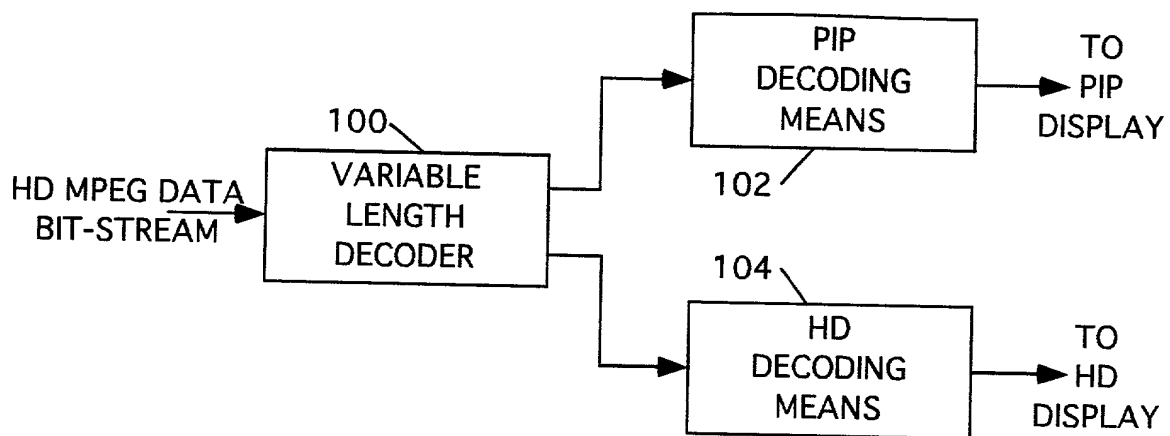


FIGURE 1

	0	1	2	3	4	5	6	7
0	DCT <sub>0,0</sub>	DCT <sub>1,0</sub>	DCT <sub>2,0</sub>	DCT <sub>3,0</sub>	DCT <sub>4,0</sub>	DCT <sub>5,0</sub>	DCT <sub>6,0</sub>	DCT <sub>7,0</sub>
1	DCT <sub>0,1</sub>	DCT <sub>1,1</sub>	DCT <sub>2,1</sub>	DCT <sub>3,1</sub>	DCT <sub>4,1</sub>	DCT <sub>5,1</sub>	DCT <sub>6,1</sub>	DCT <sub>7,1</sub>
2	DCT <sub>0,2</sub>	DCT <sub>1,2</sub>	DCT <sub>2,2</sub>	DCT <sub>3,2</sub>	DCT <sub>4,2</sub>	DCT <sub>5,2</sub>	DCT <sub>6,2</sub>	DCT <sub>7,2</sub>
3	DCT <sub>0,3</sub>	DCT <sub>1,3</sub>	DCT <sub>2,3</sub>	DCT <sub>3,3</sub>	DCT <sub>4,3</sub>	DCT <sub>5,3</sub>	DCT <sub>6,3</sub>	DCT <sub>7,3</sub>
4	DCT <sub>0,4</sub>	DCT <sub>1,4</sub>	DCT <sub>2,4</sub>	DCT <sub>3,4</sub>	DCT <sub>4,4</sub>	DCT <sub>5,4</sub>	DCT <sub>6,4</sub>	DCT <sub>7,4</sub>
5	DCT <sub>0,5</sub>	DCT <sub>1,5</sub>	DCT <sub>2,5</sub>	DCT <sub>3,5</sub>	DCT <sub>4,5</sub>	DCT <sub>5,5</sub>	DCT <sub>6,5</sub>	DCT <sub>7,5</sub>
6	DCT <sub>0,6</sub>	DCT <sub>1,6</sub>	DCT <sub>2,6</sub>	DCT <sub>3,6</sub>	DCT <sub>4,6</sub>	DCT <sub>5,6</sub>	DCT <sub>6,6</sub>	DCT <sub>7,6</sub>
7	DCT <sub>0,7</sub>	DCT <sub>1,7</sub>	DCT <sub>2,7</sub>	DCT <sub>3,7</sub>	DCT <sub>4,7</sub>	DCT <sub>5,7</sub>	DCT <sub>6,7</sub>	DCT <sub>7,7</sub>

FIGURE 1a

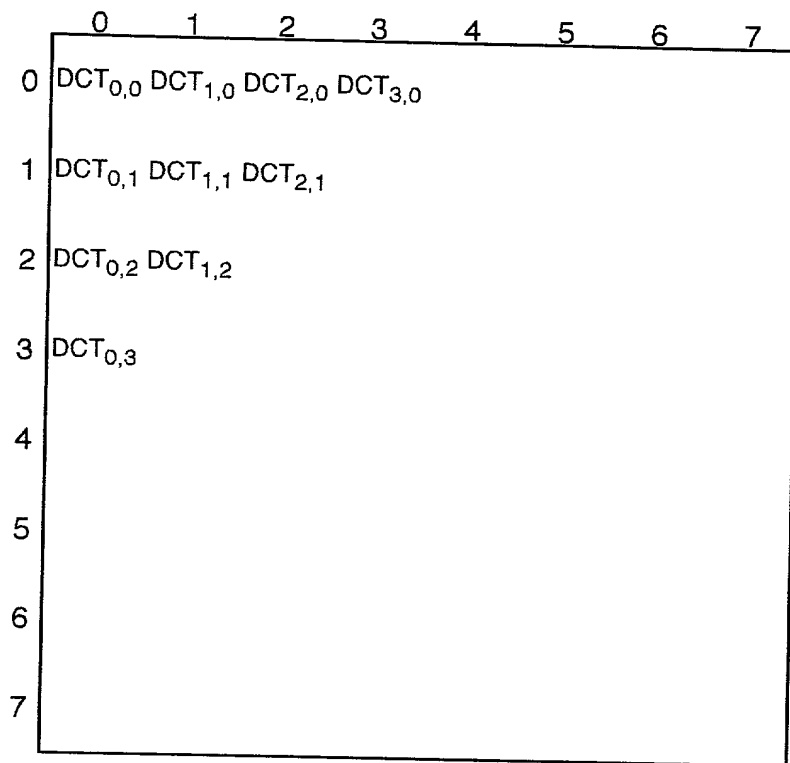


FIGURE 1b

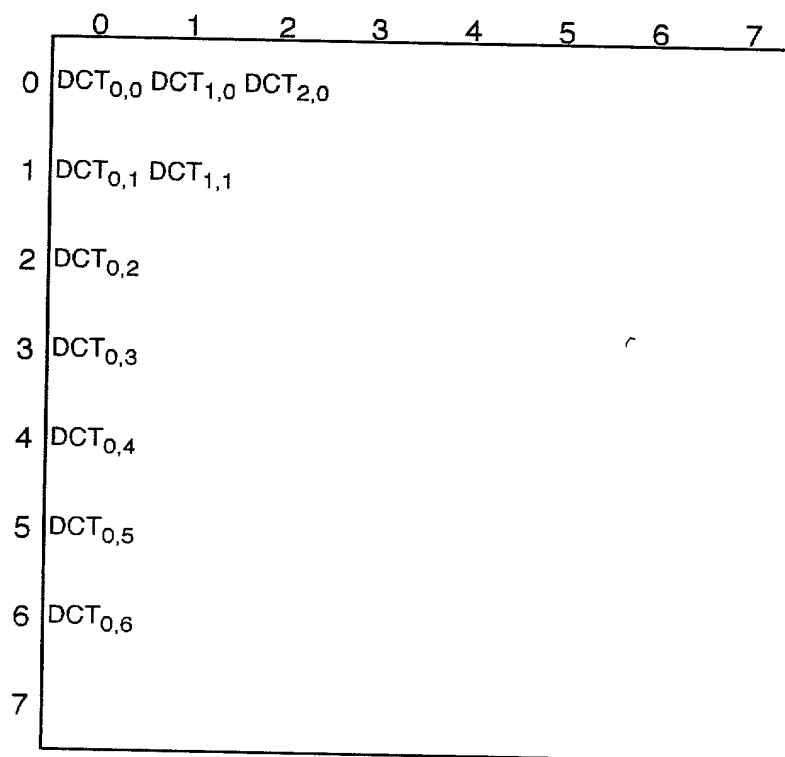


FIGURE 1c

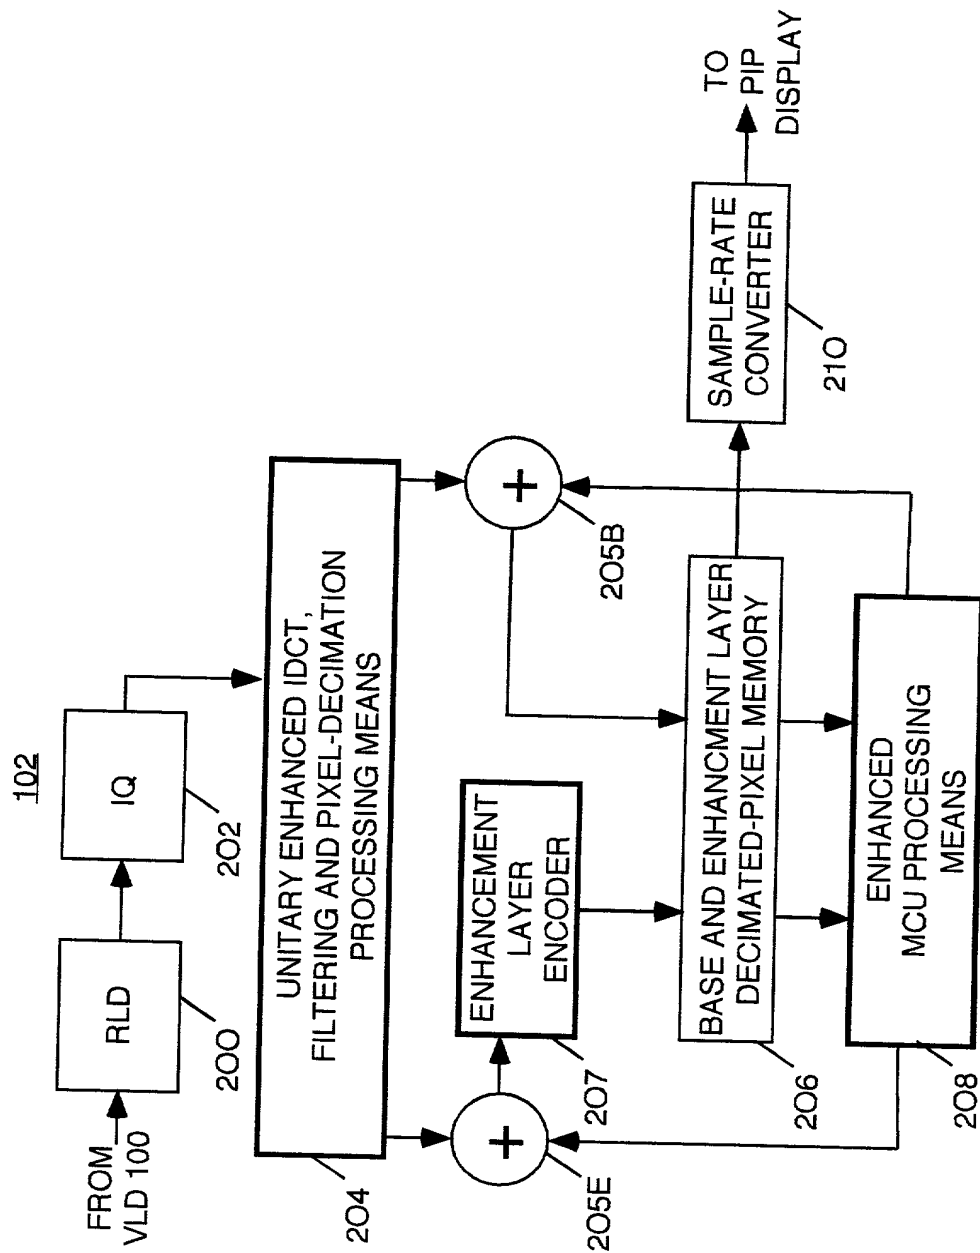


FIGURE 2



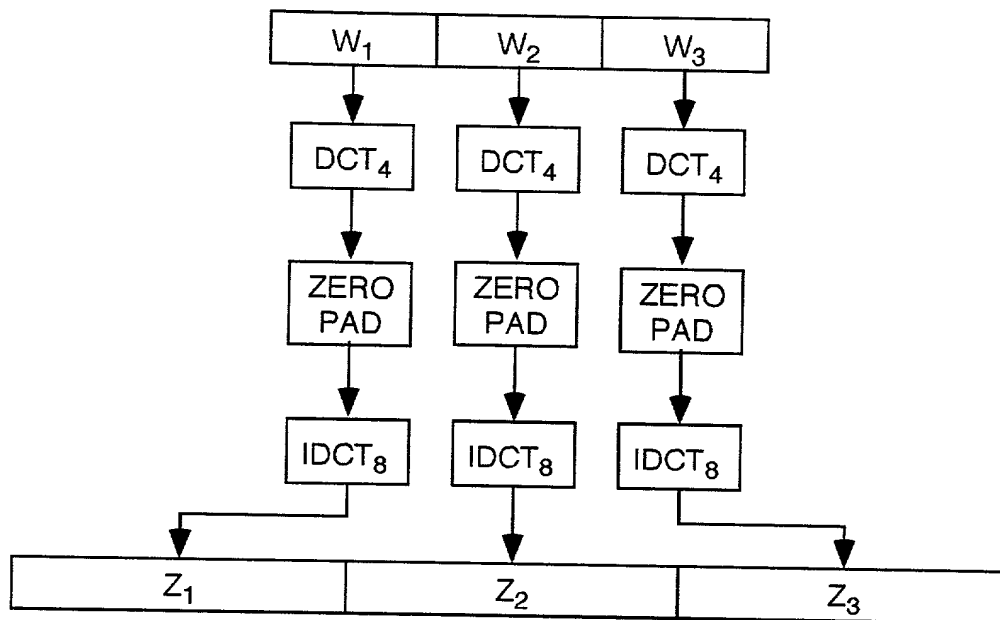


FIGURE 4

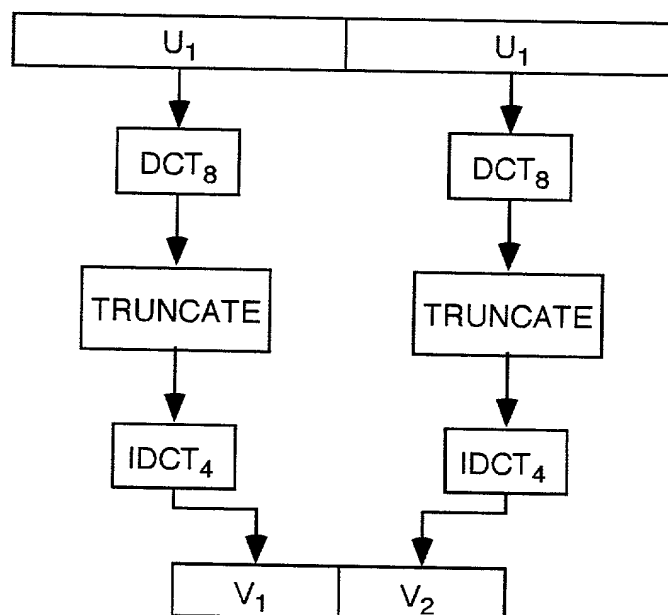


FIGURE 5



## DECLARATION AND POWERS OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled **APPARATUS AND METHOD FOR DERIVING AN ENHANCED DECODED REDUCED-RESOLUTION VIDEO SIGNAL FROM A CODED HIGH-DEFINITION VIDEO SIGNAL**

the specification of which was filed on Herewith as Application Serial No. \_\_\_\_\_ and was amended on \_\_\_\_\_, or, if not identified here by filing date and serial number, is attached hereto.

I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with 37 CFR 1.56.

I hereby claim foreign priority benefits under 35 USC 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate by me or my representatives or assigns for this invention having a filing date before that of the application on which priority is claimed.

Application No. \_\_\_\_\_ in \_\_\_\_\_ on \_\_\_\_\_ priority claimed ☐ Yes ☐ No

Application No. \_\_\_\_\_ in \_\_\_\_\_ on \_\_\_\_\_ priority claimed ☐ Yes ☐ No

Application No. \_\_\_\_\_ in \_\_\_\_\_ on \_\_\_\_\_ priority claimed ☐ Yes ☐ No

I hereby claim the benefit under 35 USC 119(e) of any United States provisional application(s) as listed below.

Application No. 60/133,429 Filed 5-11-99

Application No. \_\_\_\_\_ Filed \_\_\_\_\_

I hereby claim the benefit under 35 USC 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of 35 USC 112, I acknowledge the duty to disclose material information as defined in 37 CFR 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application

Serial No. \_\_\_\_\_ Filed \_\_\_\_\_ ☐ patented ☐ pending ☐ abandoned

Serial No. \_\_\_\_\_ Filed \_\_\_\_\_ ☐ patented ☐ pending ☐ abandoned

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 USC 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

I hereby appoint, individually and collectively, the following as my/our attorney or agent with full power of substitution and revocation, to prosecute this application and to transact all business in the U.S. Patent and Trademark Office connected therewith:

<u>Joseph S. Tripoli</u>	Registration No. <u>26,040</u>	and
<u>Ronald H. Kurdyla</u>	Registration No. <u>26,932</u>	and
<u>Alexander J. Burke</u>	Registration No. <u>40,425</u>	and
	Registration No. _____	

PLEASE ADDRESS ALL

COMMUNICATIONS TO: JOSEPH S. TRIPOLI

PATENT OPERATIONS

THOMSON MULTIMEDIA LICENSING INC.

P. O. Box 5312

PRINCETON, NEW JERSEY 08543-5312

Sole or Joint Inventor (1)	<u>MARY LAFUZE COMER</u>	<u>Mary Lafuze Comer</u>
	(Type or Print)	(Signature in Full. No initials.)
Citizenship	<u>USA</u>	Date <u>10/26/99</u>
Post Office Address	<u>2571 West 975 South, Fairmount, Indiana 46928</u>	
Residence	<u>Fairmount (Grant County), Indiana 46928</u>	
Sole or Joint Inventor (2)	<u>THOMAS EDWARD HORLANDER</u>	<u>Thomas Edward Horlander</u>
	(Type or Print)	(Signature in Full. No initials.)
Citizenship	<u>USA</u>	Date <u>10/25/99</u>
Post Office Address	<u>6234 Haverford Avenue, Indianapolis, Indiana 46220</u>	
Residence	<u>Indianapolis (Marion County), Indiana 46220</u>	
Sole or Joint Inventor (3)	_____	_____
	(Type or Print)	(Signature in Full. No initials.)
Citizenship	_____	Date _____
Post Office Address	_____	
Residence	_____	